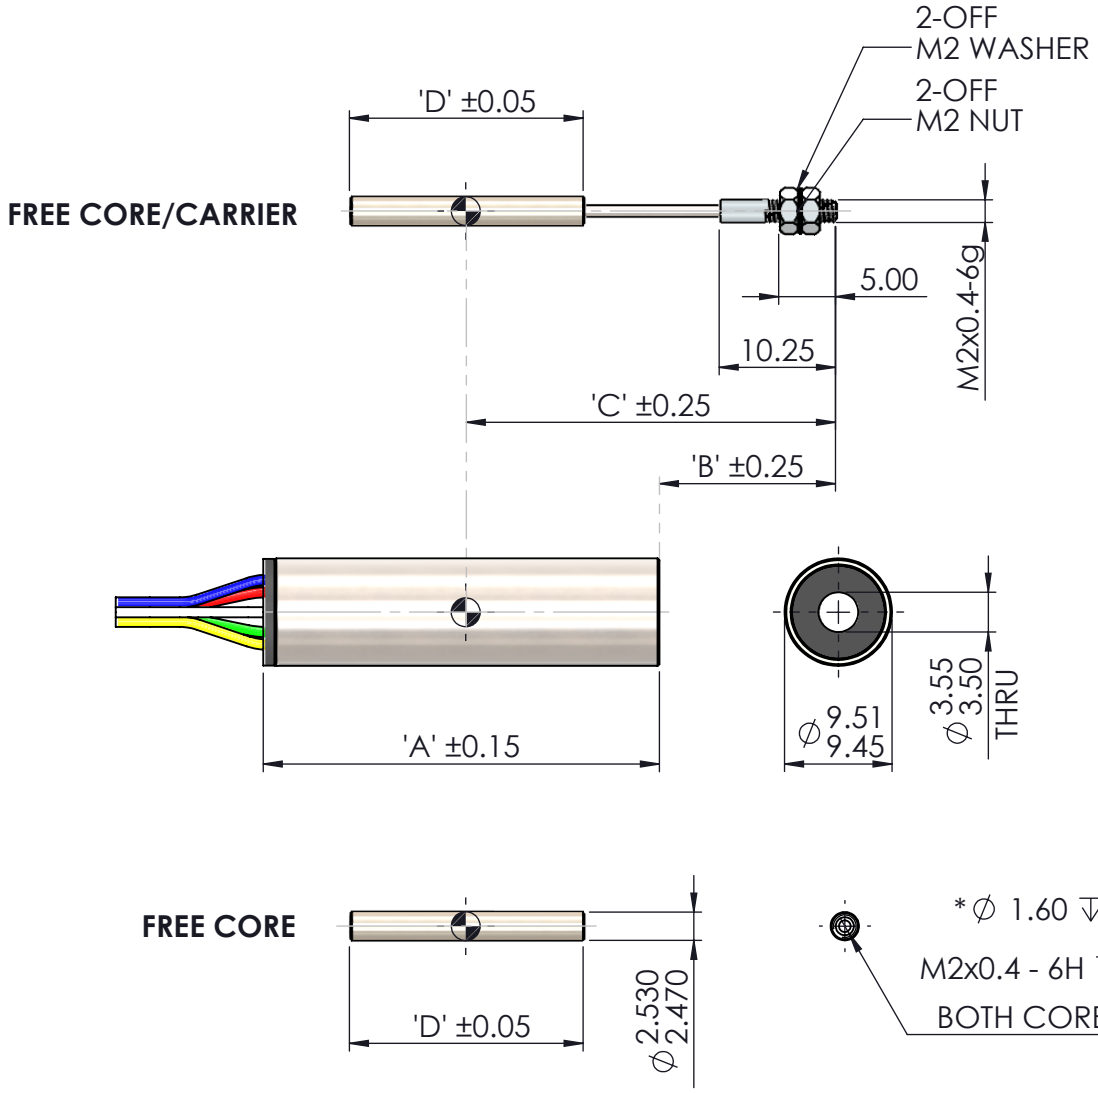

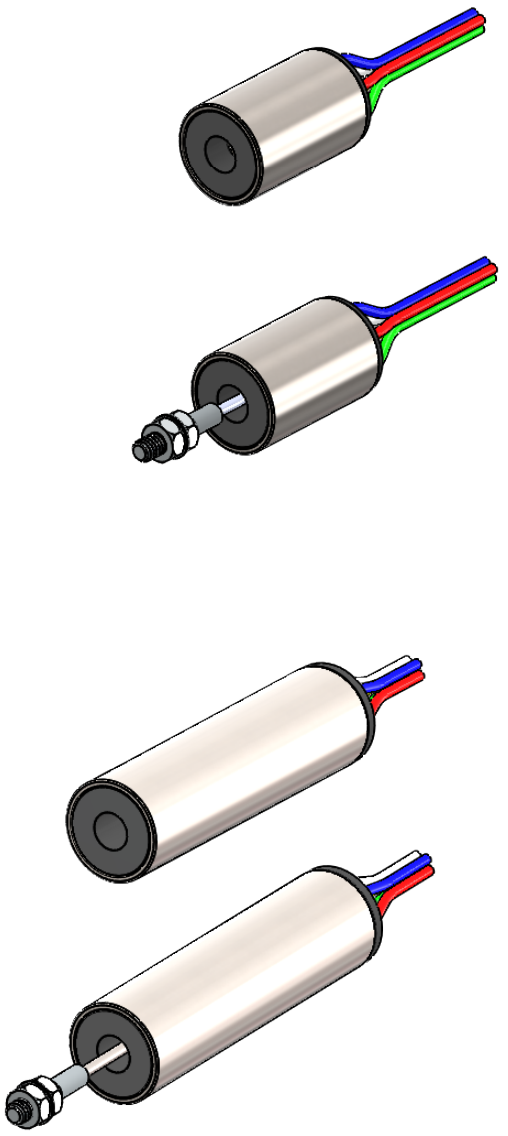

* SM/1 CORES ARE THREADED THRU.

Probe Designation	Stroke mm	'A' mm	'B' mm	'C' mm	'D' mm
SM/1.0	±1.0	15.15	12.75	20.00	9.70
SM/3.0	±3.0	35.00	15.50	32.50	20.60

Solartron Metrology
STEYNING WAY • BOGNOR REGIS • SUSSEX • ENGLANG • PO22 9ST

DRAWING NUMBER 540002-100

TITLE SM-SERIES FREE CORE/CARRIER

E.D.C.R. 23432

ISSUE 6

SOLARTRON PURSUES A POLICY OF CONTINUOUS DEVELOPMENT. SPECIFICATIONS IN THIS DOCUMENT MAY THEREFORE BE CHANGED WITHOUT NOTICE. DIMENSIONS ARE NOMINAL AND SPECIFIED IN MILLIMETRES